

FEATURES :

- * Time Lag Type
- * Radial Lead Micro Fuse
- * RoHS-Compliant Products


APPROVALS :

- * SEMKO [1-6.3A] * VDE [1-6.3A]
- * UL Recognized (US/Canada)
- * METI (PSE) [1-6.3A]
- * CCC [1-4A] * CQC [5/6.3A] * Korea Certification



SRT SERIES

DIMENSIONS :

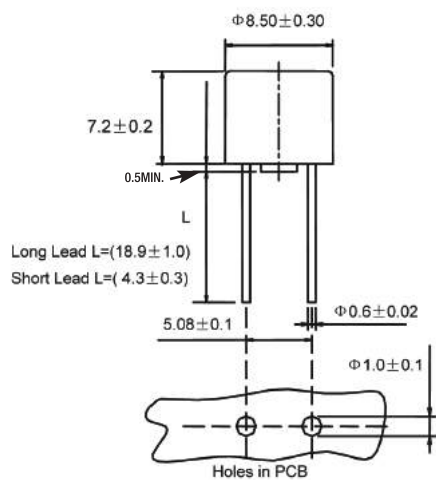


Unit : mm

ELECTRICAL CHARACTERISTICS :

% of Ampere Rating	Opening Time
150%	1 hours Min.
210%	120 sec Max.
275%	400m sec Min. / 10 sec Max.
400%	150m sec Min. / 3 sec Max.
1000%	20m sec Min. / 150m sec Max.

AVERAGE TIME CURRENT CURVES

TYPICAL

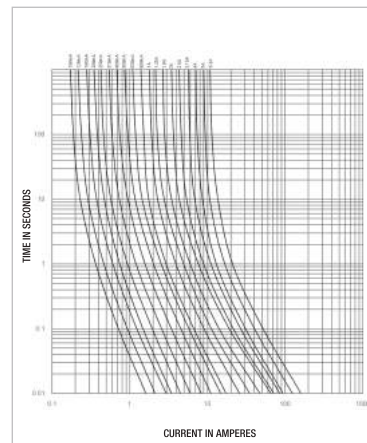

RADIAL TYPE MICRO FUSE

SPECIFICATIONS :

Product Code	Ampere Rating	Voltage Rating AC	Voltage Drop Max (mV)	Breaking Capacity		Typical Melting I ² t (A ² sec)
				IEC	METI	
SRT 100 mA	100 mA	250 V	350	35 A	100 A	0.02623
SRT 125 mA	125 mA	250 V	300	35 A	100 A	0.04499
SRT 160 mA	160 mA	250 V	280	35 A	100 A	0.08755
SRT 200 mA	200 mA	250 V	260	35 A	100 A	0.1181
SRT 250 mA	250 mA	250 V	240	35 A	100 A	0.2030
SRT 315 mA	315 mA	250 V	220	35 A	100 A	0.3597
SRT 400 mA	400 mA	250 V	200	35 A	100 A	0.6893
SRT 500 mA	500 mA	250 V	190	35 A	100 A	1.232
SRT 630 mA	630 mA	250 V	180	35 A	100 A	2.185
SRT 800 mA	800 mA	250 V	160	35 A	100 A	2.987
SRT 1 A	1 A	250 V	140	35 A	100 A	6.319
SRT 1.25 A	1.25 A	250 V	130	35 A	100 A	12.23
SRT 1.6 A	1.6 A	250 V	120	35 A	100 A	22.03
SRT 2 A	2 A	250 V	100	35 A	100 A	43.08
SRT 2.5 A	2.5 A	250 V	100	35 A	100 A	50.05
SRT 3.15 A	3.15 A	250 V	100	35 A	100 A	73.53
SRT 4 A	4 A	250 V	100	40 A	100 A	88.16
SRT 5 A	5 A	250 V	100	50 A	100 A	152.0
SRT 6.3 A	6.3 A	250 V	100	63 A	100 A	255.7