


Wire Wound Chip Ferrite Inductor – MWSD-F Series

Operating Temp. : -40°C~+85°C



FEATUREF

- Small chip suitable for surface mounting
- Large inductance with ferrite material
- Single-sided package, thinner than WL-FS series

APPLICATIONF

- Mobile phones and other electronic devices

PRODUCT IDENTIFICATION

MWSD

①

1005

②

F

③

18N

④

J

⑤

I

⑥

□□□

⑦

①

Type	
MWSD	Wire Wound Chip Inductor

②

External Dimensions	
0603[0201]	
0703[026011]	
1005[0402]	

③

Material Code	
F	Ferrite

④

Nominal Inductance	
Example	Nominal Value
1N0	1.0nH
10N	10nH
R10	100nH

⑤

Inductance Tolerance	
J	±5%
K	±10%
M	±20%


⑥

Packing	
B	Bulk Package
T	Tape & Reel

⑦

Design Code	
□□□	Design Code
*Standard product is blank	

SHAPE AND DIMENSIONS

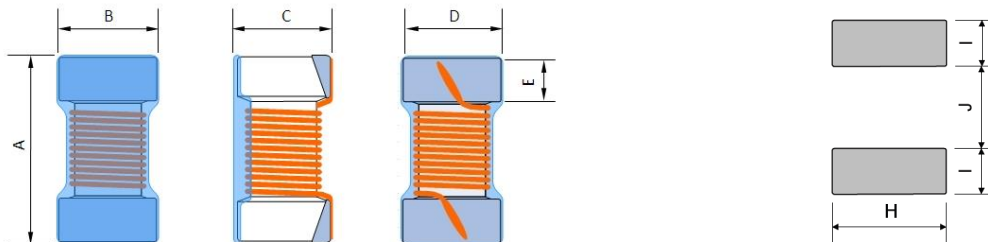

Unit: mm

Series	A	B	C	D Typ.	E	H Ref.	I Ref.	J Ref.
MWSD0603F	0.53±0.05	0.40±0.05	0.40±0.05	0.39±0.05	0.10±0.05	0.50	0.20	0.23
MWSD0703F	0.76Max.	0.43Max.	0.57Max.	0.28±0.05	0.13±0.05	0.36	0.25	0.41
MWSD1005F	1.10±0.1	0.60±0.1	0.55±0.1	0.50±0.10	0.20±0.10	0.65	0.35	0.50
MWSD1005F-M01	1.10±0.1	0.60±0.1	0.55±0.1	0.50±0.10	0.20±0.10	0.65	0.35	0.50

SPECIFICATIONS

MWSD0603F TYPE

Part Number	Inductance	Tolerance	L Test Freq.	Min. Self-resonant Frequency	Max. DC Resistance	Max. Rated Current
Units	nH	-	MHz	GHz	Ω	mA
Symbol	L	-	Freq.	S.R.F	DCR	I _r
MWSD0603F33N□T	33	K	7.9	3.4	0.15	340
MWSD0603F51N□T	51	K	7.9	2.9	0.30	280
MWSD0603F68N□T	68	K	7.9	2.6	0.33	220
MWSD0603F91N□T	91	K	7.9	2.35	0.37	200
MWSD0603FR11□T	110	K	7.9	2.1	0.48	170
MWSD0603FR14□T	140	K	7.9	2.0	0.65	160
MWSD0603FR17□T	170	K	7.9	1.85	0.86	140
MWSD0603FR20□T	200	K	7.9	1.7	1.25	110

MWSD0703F TYPE

Part Number	Inductance	Tolerance	L Test Freq.	Min. Self-resonant Frequency	Max. DC Resistance	Max. Rated Current
Units	nH	-	MHz	GHz	Ω	mA
Symbol	L	-	Freq.	S.R.F	DCR	I _r
MWSD0703F27N□T	27	J	7.9	3.9	0.11	480
MWSD0703F72N□T	72	J	7.9	2.6	0.4	210
MWSD0703FR10□T	100	J	7.9	2.3	0.5	200
MWSD0703FR15□T	150	J	7.9	1.8	0.6	190
MWSD0703FR27□T	270	J	7.9	1.6	1.15	130
MWSD0703FR43□T	430	J	7.9	0.9	1.85	100
MWSD0703FR56□T	560	J	7.9	1.0	2.8	90

MWSD1005F TYPE

Part Number	Inductance	Tolerance	L Test Freq.	Min. Self-resonant Frequency	Max. DC Resistance	Max. Rated Current
Units	nH	-	MHz	GHz	Ω	mA
Symbol	L	-	Freq.	S.R.F	DCR	I _r
MWSD1005F20N□T	20	J,K,M	7.9	2600	0.050	1600
MWSD1005F22N□T	22	J,K,M	7.9	2500	0.065	1300
MWSD1005F33N□T	33	J,K,M	7.9	2300	0.060	1400
MWSD1005F36N□T	36	J,K,M	7.9	2300	0.075	1300
MWSD1005F39N□T	39	J,K,M	7.9	2200	0.115	830
MWSD1005F51N□T	51	J,K,M	7.9	1930	0.070	1100
MWSD1005F56N□T	56	J,K,M	7.9	1900	0.095	1000
MWSD1005F72N□T	72	J,K,M	7.9	1650	0.100	1000
MWSD1005F78N□T	78	J,K,M	7.9	1600	0.130	970
MWSD1005F85N□T	85	J,K,M	7.9	1600	0.130	970
MWSD1005F96N□T	96	J	100	1100	0.160	730
MWSD1005FR10□T	100	J,K,M	7.9	1400	0.160	900
MWSD1005FR14□T	140	J,K,M	7.9	1220	0.260	630
MWSD1005FR18□T	180	J,K,M	7.9	1150	0.280	560

SPECIFICATIONS

MWSD1005F TYPE

Part Number	Inductance	Tolerance	L Test Freq.	Min. Self-resonant Frequency	Max. DC Resistance	Max. Rated Current
Units	nH	-	MHz	GHz	Ω	mA
Symbol	L	-	Freq.	S.R.F	DCR	I _r
MWSD1005FR20□T	200	J,K,M	7.9	1000	0.440	400
MWSD1005FR22□T	220	J,K,M	7.9	1150	0.530	380
MWSD1005FR25□T	250	J,K,M	7.9	900	0.450	520
MWSD1005FR27□T	270	J,K,M	7.9	860	0.550	360
MWSD1005FR30□T	300	J,K,M	7.9	860	0.410	420
MWSD1005FR33□T	330	J,K,M	7.9	820	0.560	350
MWSD1005FR36□T	360	J,K,M	7.9	810	0.575	360
MWSD1005FR39□T	390	J,K,M	7.9	760	0.750	300
MWSD1005FR42□T	420	J,K,M	7.9	700	0.700	340
MWSD1005FR47□T	470	J,K,M	7.9	650	0.730	310
MWSD1005FR56□T	560	J,K,M	7.9	600	0.920	200
MWSD1005F2R2□T	2200	K,M	1	100	1.8	170

MWSD1005F-M01 TYPE


Part Number	Inductance	Tolerance	L Test Freq.	Min. Self-resonant Frequency	Max. DC Resistance	Max. Rated Current
Units	nH	-	MHz	GHz	Ω	mA
Symbol	L	-	Freq.	S.R.F	DCR	I _r
MWSD1005F18N□TM01	18	J,K,M	100	3000	0.046	1400
MWSD1005F20N□TM01	20	J,K,M	100	3000	0.028	2200
MWSD1005F33N□TM01	33	J,K,M	100	1800	0.065	1300
MWSD1005F34N□TM01	34	J,K,M	100	2500	0.036	1800
MWSD1005F48N□TM01	48	J,K,M	100	1400	0.078	1100
MWSD1005F53N□TM01	53	J,K,M	100	2000	0.060	1300
MWSD1005F68N□TM01	68	J,K,M	100	1300	0.120	820
MWSD1005F70N□TM01	70	J,K,M	100	1300	0.120	820
MWSD1005F77N□TM01	77	J,K,M	100	2000	0.090	1100
MWSD1005F96N□TM01	96	J,K,M	100	1100	0.160	730
MWSD1005FR11□TM01	106	J,K,M	100	1500	0.144	850
MWSD1005FR13□TM01	130	J,K,M	100	1000	0.230	640
MWSD1005FR14□TM01	140	J,K,M	100	1000	0.216	650
MWSD1005FR16□TM01	160	J,K,M	100	900	0.330	480
MWSD1005FR18□TM01	180	J,K,M	100	1000	0.312	560
MWSD1005FR20□TM01	200	J,K,M	100	800	0.470	390
MWSD1005FR22□TM01	220	J,K,M	100	1100	0.470	450
MWSD1005FR27□TM01	270	J,K,M	100	730	0.520	420
MWSD1005FR33□TM01	330	J,K,M	100	520	0.560	390
MWSD1005FR39□TM01	390	J,K,M	100	350	0.620	370
MWSD1005FR42□TM01	420	J,K,M	10	320	0.620	370
MWSD1005FR47□TM01	470	J,K,M	10	380	0.660	350
MWSD1005FR56□TM01	560	K,M	10	300	0.710	300
MWSD1005F2R2□TM01	2200	K,M	1	100	1.80	170

※ □: Please specify the inductance tolerance code (J=±5%, K=±10%, M=±20%).

TYPICAL ELECTRICAL CHARACTERISTICS


MWSD0603F TYPE

Inductance vs. Frequency Characteristics

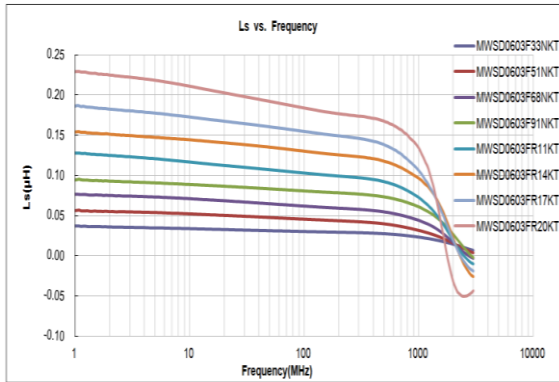


MWSD0703F TYPE

Inductance vs. Frequency Characteristics

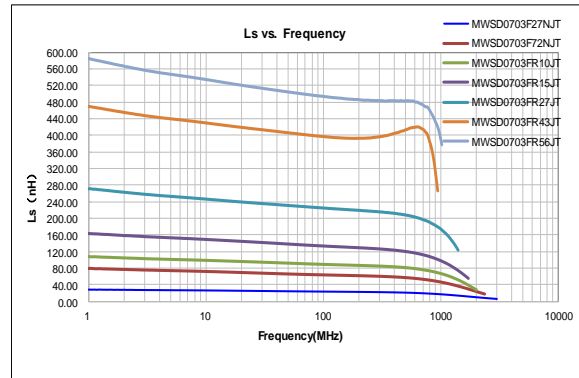


MWSD1005F TYPE

Inductance vs. Frequency Characteristics

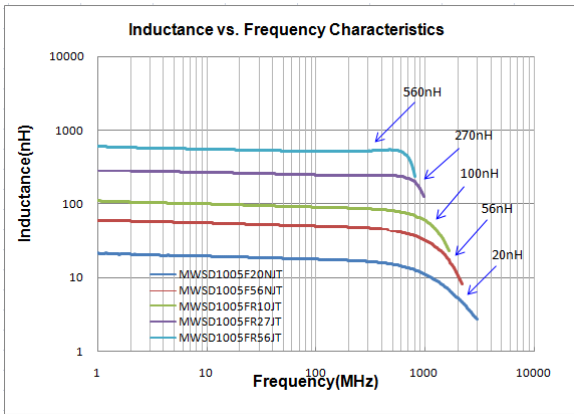


Impedance vs. Frequency Characteristics

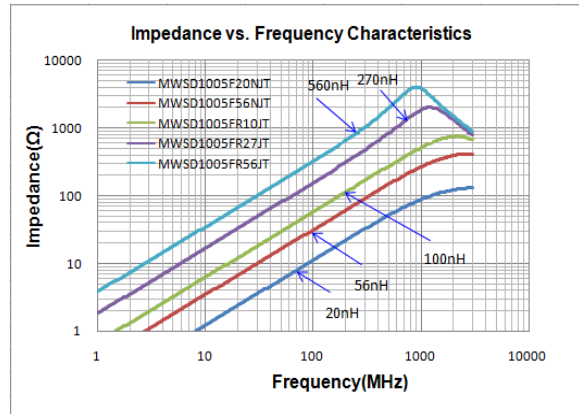

MWSD1005F-M01 TYPE

Inductance vs. Frequency Characteristics

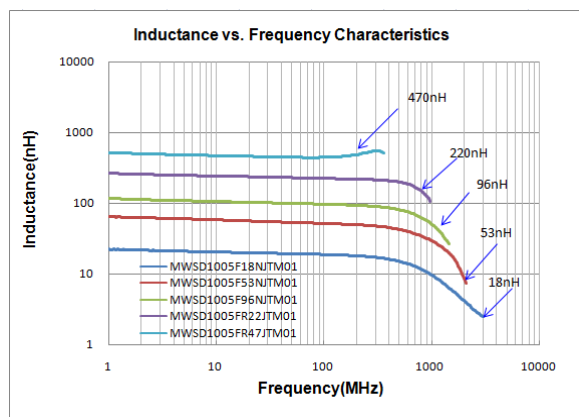

Impedance vs. Frequency Characteristics

