

# TOL-B95UAJC


## Lamp LED

Part Number	Chip		Lens Color
	Material	Source Color	
TOL-B95UAJC	AlGaInP	High Bright Amber	Water Clear

## Features

- I.C. compatible.
- Low power consumption.
- Compatible with wave soldering process.
- 2\*3mm rectangular package.
- Long life, stable and reliable.
- RoHS compliant.

## Dimensions

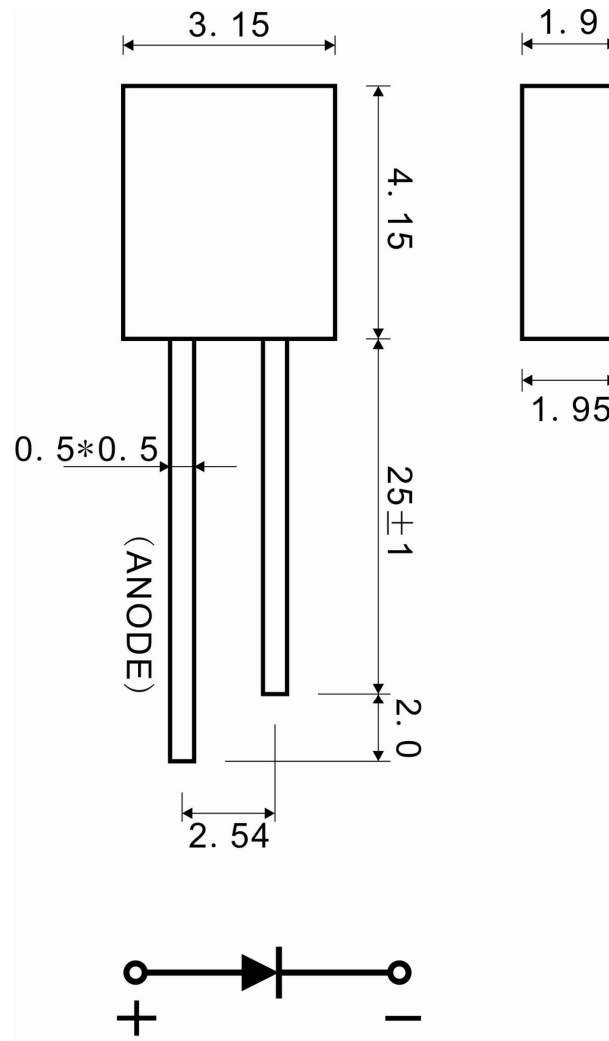

### Notes:

1. All dimensions are in millimeter.
2. Tolerance is  $\pm 0.25$ mm unless otherwise notes.

## Absolute Maximum Rating @ Ta=25°C

Parameter	Maximum Rating	Unit
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	80	mA
Power Dissipation	60	mW
Continuous Forward Current	20	mA
Reverse Voltage	5	V
Operating Temperature Range	-40°C to +85°C	
Storage Temperature Range	-40°C to +100°C	
Wave Soldering Profile For Lead-free Soldering	260°C, 5 Seconds	

## Electrical / Optical Characteristic @ Ta=25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	I <sub>v</sub>	1000		2000	mcd	I <sub>F</sub> =20mA
Viewing Angle	2θ <sub>1/2</sub>		45		deg	I <sub>F</sub> =20mA
Forward Voltage	V <sub>F</sub>	1.8		2.4	V	I <sub>F</sub> =20mA
Reverse Current	I <sub>R</sub>			10	μA	V <sub>R</sub> =5V
Dominant Wavelength	λ <sub>d</sub>		605		nm	I <sub>F</sub> =20mA
Spectral Line Half-Width	Δλ		17		nm	I <sub>F</sub> =20mA