

HSF


NOTES:

Current Rating:8A
 Voltage Rating:300V
 Contact Resistance:8milliohm Max
 Withstand Voltage:AC2000V
 Insulation Resistance:1000Megohm Min
 Screw Torque: 2 lbf.in
 Wire range: 16-30AWG
 Operation Temperature:-40°C to +105°C

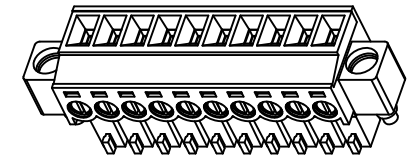
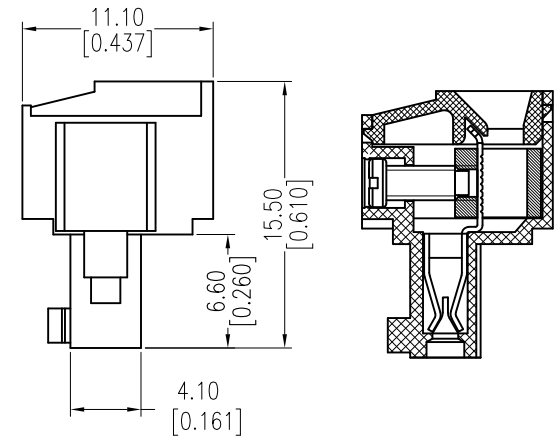
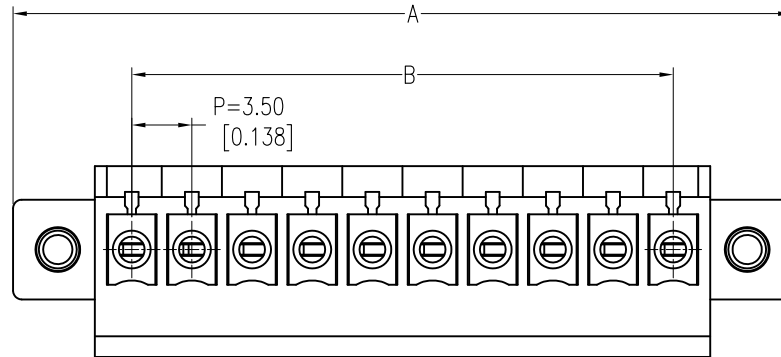
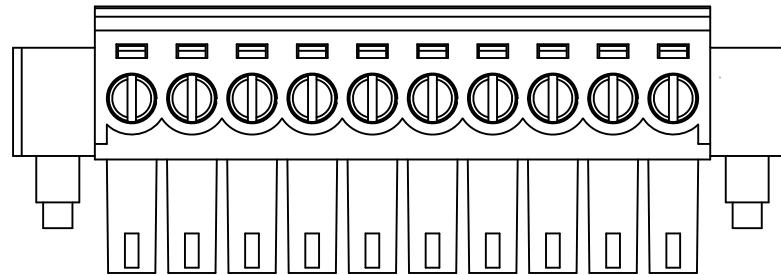
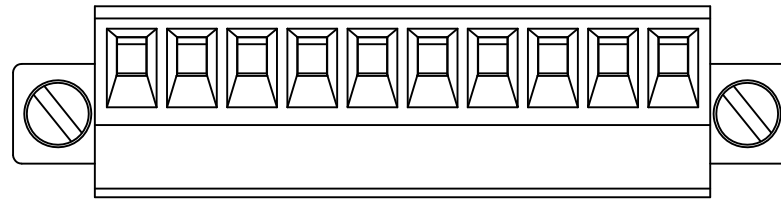
Housing Material:PA66 UL94V-0
 Cover Material:PA66 UL94-V0
 Screw:Steel
 Pin Block:Brass
 Contact:Phosphor Bronze
 Side Screw:Steel




Ordering Information:

P F 350 - C XX A SM W 1

F=Female Pitch 350=3.50
 No.of Pins 02-20P
 Color A=Green SM=Matte Tin
 Type W=With Screw 

11P	48.80 ±0.30	35.00 ±0.30			
10P	45.30 ±0.30	31.50 ±0.30	20P	80.30 ±0.40	66.50 ±0.40
9P	41.80 ±0.30	28.00 ±0.30	19P	76.80 ±0.40	63.00 ±0.40
8P	38.30 ±0.20	24.50 ±0.20	18P	73.30 ±0.40	59.50 ±0.40
7P	34.80 ±0.20	21.00 ±0.20	17P	69.80 ±0.40	56.00 ±0.40
6P	31.30 ±0.20	17.50 ±0.20	16P	66.30 ±0.40	52.50 ±0.40
5P	27.80 ±0.20	14.00 ±0.20	15P	62.80 ±0.40	49.00 ±0.40
4P	24.30 ±0.20	10.50 ±0.20	14P	59.30 ±0.30	45.50 ±0.30
3P	20.80 ±0.20	7.00 ±0.20	13P	55.80 ±0.30	42.00 ±0.30
2P	17.30 ±0.20	3.50 ±0.10	12P	52.30 ±0.30	38.50 ±0.30
PIN	A	B	PIN	A	B



REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A2	2015/07/15	Modify		X.X ±0.40	Allen	2015/07/15	UNIT	mm	PF350-CXXASMW1 
A1	2012/05/09	MODIFY PM350-01-XX-A-SM → PF350-CXXASMW1		X.XX ±0.25	CHECK	DATE	inch	TITLE:	
A0	2011/06/07	NEW	—	X.XXX ±0.15	APPROVE	DATE	SIZE	A4	3.50mm Pitch Female Pluggable Terminal Blocks
				Angle ± 3'			SHEET	1/1	Customer NO.
				DIM TOL			PROJ.	